



## 32 743 000 EUROECO PÁKOVÁ VAŇOVÁ BATÉRIA, DN 15

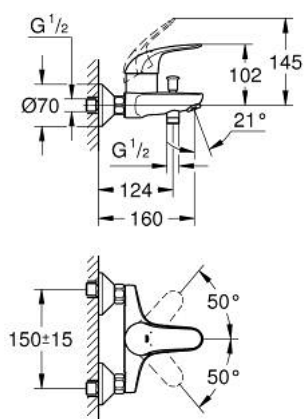

### POPIS PRODUKTU

- Colour: chrom
- wall mounted
- metal lever
- GROHE SilkMove 46 mm ceramic cartridge
- Povrchová úprava GROHE Long-Life
- GROHE Water Saving technológia pre nízku spotrebu vody a perfektný prietok
- adjustable flow rate limiter
- automatic diverter: bath/shower
- mousseur
- integrated non-return valve in the shower outlet 1/2"
- S-unions
- metal wall escutcheons
- optional temperature limiter ref. no. 46 308
- protected against backflow

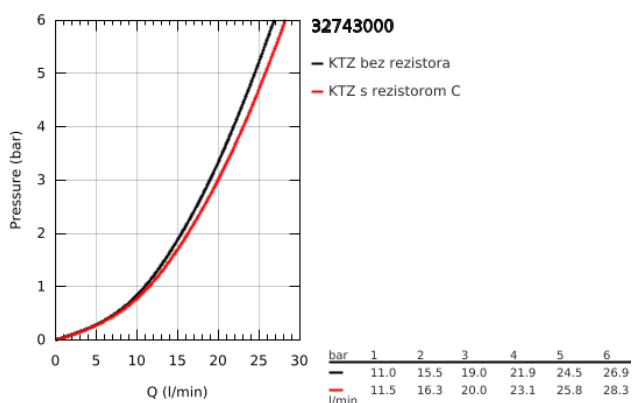

This diagram shows an exploded view of a mechanical assembly. The components are numbered as follows:

- 1**: A large vertical rectangular frame or housing.
- 2**: A cylindrical component at the top of the frame.
- 3**: A smaller cylindrical component below the top one.
- 4**: A small cup-like component.
- 5**: A small cylindrical component.
- 6**: A small cylindrical component.
- 7**: A small cylindrical component.
- 8**: A small cylindrical component.
- 9**: A small cylindrical component.
- 10**: A small cylindrical component.
- 11**: A small cylindrical component.

The diagram illustrates the assembly sequence and relative positions of these parts. Arrows indicate the direction of assembly for some components, such as the insertion of part 10 into part 3 and the attachment of part 11 to part 9.

- 1: Kompletná páka (Č. obj. 46644000)
- 2: Kryt (Č. obj. 46578000)
- 3: Kartuša (Č. obj. 46048000)
- 4: Prepínanie (Č. obj. 65648000)
- 5: Prepínanie (Č. obj. 65655000)
- 6: Spätná klapka (Č. obj. 08565000)
- 7: Perlátor (Č. obj. 13952000)
- 8: Prípojný skrutkový spoj DN 15 (Č. obj. 45044000)
- 9: S-prípojka (Č. obj. 12075000)
- 9.1: Tesnenie (Č. obj. 0138600M)
- 9.2: Rozeta (Č. obj. 0221000M)
- 10: Obmedzovač teploty (Č. obj. 46375000)\*
- 11: Predĺženie DN 20, 20 mm (Č. obj. 0713000M)\*

\* Voliteľné príslušenstvo