


## 35 500 000 GROHE RAPIDO T PODOMIETKOVÉ TELESO PRE TERMOSTATICKÉ BATÉRIE

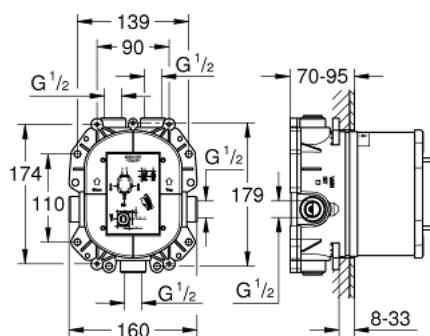

### POPIS PRODUKTU

- for use with Grohtherm Special and Grohtherm F
- without finishing trim set
- flat installation depth 70 - 95 mm
- easy to install, premounted and tested unit
- GROHE TurboStat compact cartridge with wax thermoelement
- 2 výstupy hore DN 15
- high flow rate up to 50 l/min. by use of three outlets
- bottom outlet 1/2" can be used only with separate stop valve
- safe to install, stable built-in-box and protective cap
- fixation options for solid walls and dry cladding
- material for wall sealing included
- Aquadimmer-diverter for bath mixer or stop valve for shower mixer in finishing trim set
- telo z mosadze odolnej voči odzinkovaniu
- built-in non return valves and dirt strainers
- GROHE Water Saving technológia pre nízku spotrebu vody a perfektný prietok
- min. recommended pressure 1.0 bar

## 35 500 000 GROHE RAPIDO T PODOMIETKOVÉ TELESO PRE TERMOSTATICKÉ BATÉRIE



### NÁHRADNÉ DIELY , novembra 2005 – now

1: Kompaktná kartuša termostatu DN 20 (Č. obj. 47483000)

2: Upevň.kružok (Č. obj. 47765000)

3: Spätná klapka (Č. obj. 47753000)

4: Súprava tesnení (Č. obj. 48263000)

5: Kľúč (Č. obj. 19332000)\*

6: Zaistenie proti spätnému toku, DIN EN 1717 (Č. obj. 29007000)\*

7: Kompaktná kartuša termostatu DN 20 (Č. obj. 47186000)\*

\* Voliteľné príslušenstvo