


38 511 001 **RAPID SL PRE PISOÁRE**




POPIS PRODUKTU

- with roughing-in set for radar electronic
- stavebná výška 1,13 m a 1,30 m
- for on-the-wall installations or studed walls
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- height adjustable fitting connections
- quick adjustment, lockable
- TÜV approved
- fixing material
- HT-outlet bend Ø 50 mm
- inlet connection and inlet connecting set
- fixing bolts M8, with fixing device for ceramic
- box for concealed installation including roughing-in box
- water group with stop valve and flush elbow
- without accessories for on-the-wall installation
- without installation set for radar electronic
- without tiling set

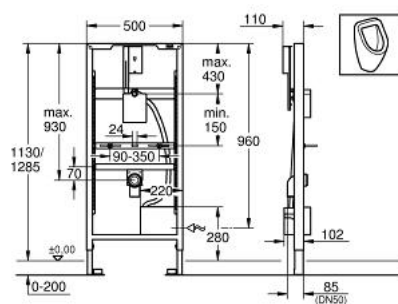

38 511 001 **RAPID SL PRE PISOÁRE**

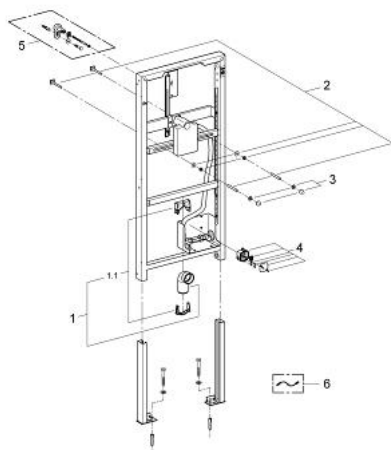

NÁHRADNÉ DIELY , marca 2011 – now

- 1: Odtokové koleno DN 50 (Č. obj. 42943000)
- 1.1: Držiak odtokového oblúka (Č. obj. 42236000)
- 2: Závitový kolík kompletný (Č. obj. 43078000)
- 3: Upevnenie (Č. obj. 4307500M)
- 4: Trafo-pripojovacia krabica (Č. obj. 42279000)
- 5: Nástená prípojka (Č. obj. 3855800M)*
- 6: Predlžovací kábel (Č. obj. 36157000)*

* Voliteľné príslušenstvo