



## 38 718 001 **RAPID SL** PRE ZÁVESNÉ WC

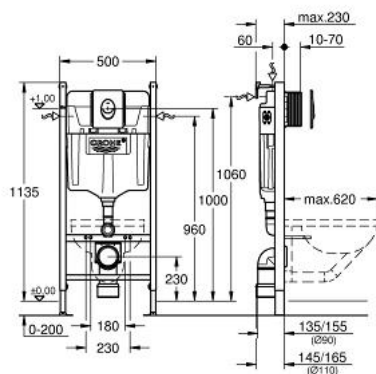

### POPIS PRODUKTU

- splachovacia nádrž GD 2, 6 - 9 l
- stavebná výška 1,13 m
- for on-the-wall installations or studded walls
- powder coated steel frame, self-supporting
- for dry-cladding
- with fixed connections
- quick adjustment, lockable
- fixing material
- 2 WC fixing bolts
- fixing device for ceramic
- distance of fixing bolts 180/230 mm
- spacer Ø 90 mm
- PP outlet bend Ø 90/110 mm
- inlet and outlet connecting set
- flushing cistern GD 2, 6 - 9 l
- nastavené z výroby na 6 l - 3 l
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- water supply from left/right/back or top
- low noise (group I acc. to German Noise Specification)
- insulated against condensation
- angle valve ½"
- with push fit flexible hose union
- skrátiteľná revízna šachta vrát. ochrany počas fázy výstavby, na vertikálne použitie
- including flush plate Skate Air
- vertical installation
- 156 x 197 mm
- white
- material: ABS
- 2 wall brackets with fixing material

## 38 718 001 **RAPID SL** PRE ZÁVESNÉ WC

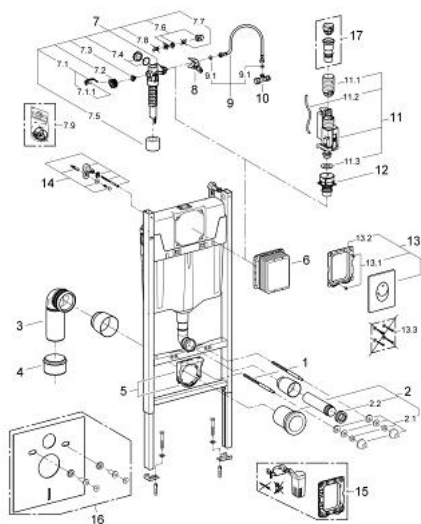

### NÁHRADNÉ DIELY , marca 2013 – now

- 1: Závitový kolík (Č. obj. 4276400M)
- 2: Prívodná a odpadová súprava (Č. obj. 37311K00)
- 2.1: Upevnenie umývadla (Č. obj. 43511SH0)
- 2.2: Spájací diel (Č. obj. 37119000)
- 3: PP-odpadové koleno DN 90 (Č. obj. 42327000)
- 4: Dištančná rúrka 3" (Č. obj. 42766000)
- 5: Príchytka pre odpadový oblúk (Č. obj. 42243000)
- 6: Revízny otvor (Č. obj. 66791000)
- 7: Napúšťací ventil DN15 (Č. obj. 37095000)
- 7.1: Kompletná páka (Č. obj. 43734000)
- 7.1.1: Tesnenie (Č. obj. 4377000M)
- 7.2: Ventilová hlavica (Č. obj. 43536000)
- 7.3: Membrána (Č. obj. 4375800M)
- 7.4: Skrutkovací kryt (Č. obj. 43735000)
- 7.5: Ventilový plavák, 5 ks (Č. obj. 4379100M)
- 7.6: Súprava tesnení (Č. obj. 43722000)\*
- 8: Konzola (Č. obj. 42246000)
- 9: Prípojná hadička (Č. obj. 42233000)
- 9.1: O-krúžok (Č. obj. 0319100M)
- 10: Roháčik (Č. obj. 43821000)
- 11: AV1 ventil kompletný s rozšíreným potrubím (Č. obj. 42320000)
- 11.1: Predĺženie pre prepádovú rúru (Č. obj. 42313000)
- 11.2: pneumatická hadica 1 ks (Č. obj. 42319000)
- 11.3: Tesnenie (Č. obj. 42310000)
- 12: Sedlo ventilu pre GD2 (Č. obj. 42315000)
- 13: ovládacie tlačidlo (Č. obj. 38505SH0)
- 13.1: Skrutka (Č. obj. 6636200M)
- 13.2: Nosný rám (Č. obj. 43207000)
- 13.3: Upevňovací set (Č. obj. 4308500M)\*
- 13.4: Upevňovací set (Č. obj. 4215800M)\*
- 14: Nástená prípojka (Č. obj. 3855800M)
- 15: Prestavbový set (Č. obj. 38796000)\*
- 16: Tlmiaci set (Č. obj. 37131000)\*
- 17: 4.5 l adaptér pre GD2 (Č. obj. 42333000)\*

\* Voliteľné príslušenstvo